

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|--|-----------|---|
| (51) International Patent Classification ⁷ : D21H 23/26 | A1 | (11) International Publication Number: WO 00/40799 (43) International Publication Date: 13 July 2000 (13.07.00) |
|--|-----------|---|

(21) International Application Number: PCT/FI00/00008

(22) International Filing Date: 5 January 2000 (05.01.00)

(30) Priority Data:
990008 5 January 1999 (05.01.99) FI

(71) Applicant (for all designated States except US): VALMET CORPORATION [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): RANTANEN, Rauno [FI/FI]; Oksalanmäki, FIN-40950 Muurame (FI). LIPPO-NEN, Juha [FI/FI]; Ruusalantie 2 as. 1, FIN-40270 Palokka (FI).


(74) Agent: SEPPO LAINE OY; Itämerenkatu 3 B, FIN-00180 Helsinki (FI).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: METHOD AND ASSEMBLY FOR SUPPORTING A PAPER AND BOARD WEB IN FINISHING EQUIPMENT

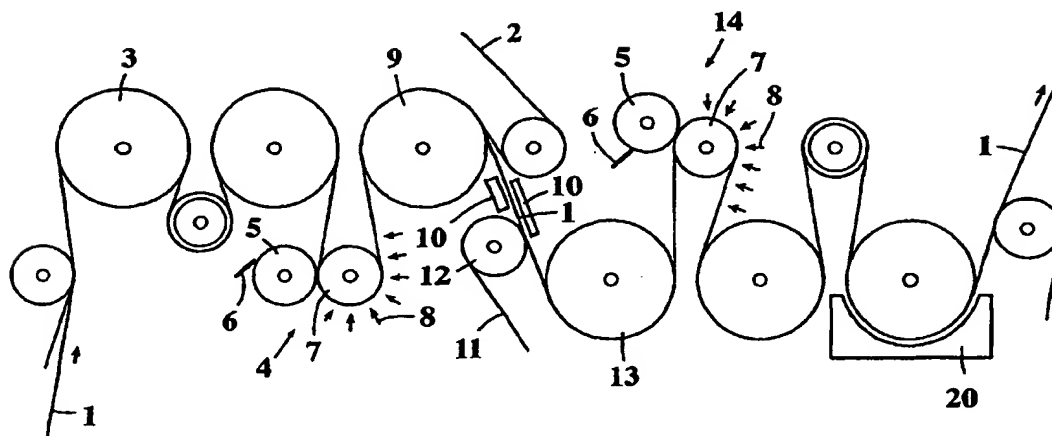

(57) Abstract

Method and assembly for supporting a web (1) during the postprocessing of a web of paper or board, in which method the web is passed from a preceding device to at least one next downstream located web treatment device (4) wherein to at least one side of the web (1) is applied a treatment agent causing wetting of said side of said web, and the web (1) exiting said web treatment device is passed to at least one dryer means (8). The web (1) is contactingly supported in a continuous and unbroken manner at least from said web treatment device (4) to said dryer means (8). Advantageously, the web (1) is dried by means of at least one dryer (3) before taking the web to the web treatment device (4), and the web is contactingly supported in a continuous and unbroken manner at least from said dryer means (3) preceding said web treatment device (4) to said dryer means (8) located downstream next to said web treatment device.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | | Republic of Korea | PT | Portugal | | |
| CN | China | KR | Republic of Korea | RO | Romania | | |
| CU | Cuba | KZ | Kazakhstan | RU | Russian Federation | | |
| CZ | Czech Republic | LC | Saint Lucia | SD | Sudan | | |
| DE | Germany | LI | Liechtenstein | SE | Sweden | | |
| DK | Denmark | LK | Sri Lanka | SG | Singapore | | |
| EE | Estonia | LR | Liberia | | | | |

Method and assembly for supporting a paper and board web
in finishing equipment

5 The invention relates to a method according to the pre-
amble of claim 1 for supporting and passing webs such as
paper and board webs in a contacting manner in a
paper/board machine in which the base web forming section
is immediately followed by web finishing devices for
10 immediate treatment of a web leaving the base web forming
section.

The invention also concerns an assembly suited for imple-
menting said method.

15 With the increasing demands on higher web speeds and
quality, well-behaved supporting and drying of a running
web are becoming increasingly important in paper and
board manufacture. Therefore, it is desirable to pass the
web in a continuously or at least partly supported manner
20 over a maximally long total distance of its travel in the
web finishing sections. The technique used for web
support also affects the drying process of the web. As
web breaks occur more easily in a wet web than in a dry
web, unsupported passages of the wet web over the
25 distance from one support member to the next, before the
wetted web is dried, represent potential points of web
breaks. If the web can be supported in a contacting
manner as long as the web is wet, the number of web
breaks can be reduced. Simultaneously, the coating of the
30 web may also be carried out at a higher moisture content
and thus in a state of weaker tensional strength than has
been possible in the prior art. As a result of processing
the web at said higher moisture content, substantial
savings can be attained in regard to both the overall
35 energy consumption and investment costs of the dryer
equipment. Further, as the specific drying capacity re-
quired in the different process steps for obtaining

sufficient strength qualities of the web is not set any more, the moisture content of the web can be kept optimal with respect to the desired end product qualities throughout the manufacturing process.

5

In US Pat. No. 5,547,509 is described an apparatus for supporting a paper web during the application step when the web is passed through the coating and doctoring installation. In this embodiment, the coating applicator may be, e.g., an application roll and the web is passed onto a support belt before it enters the nip of the applicator and, after application, is passed in a supported manner to the dryers. The function of the support belt is to reduce the number of web breaks in application and doctoring as well as along the web passage from the doctor blade to the dryers. The dryers are of the non-contacting type and the web is supported over its passage between the dryers by means of small-diameter support rolls. The supported portion of web travel covers the applicators only. Before entering the applicator and during drying, the web runs unsupported. Furthermore, as the application takes place using an applicator roll, the entry of the web to the applicator roll is very complicated, because the applicator roll (kissing roll) of a roll applicator must be arranged to rotate in a coating mix pan, which necessarily requires the applicator roll to be the lower roll in the roll nip and, as a result, the coated side of the web to be the underside of the web entering the applicator nip. Obviously, passing the web to one applicator is simple along a straight path, but as the web is conventionally coated on both sides, reversing the web travel for coating the opposed side requires a complicated guide roll set in which the web cannot be supported by any practicable means using a support wire or belt.

35

In German patent publication no. 44 20242 is described an

application method in which the web is coated in a film-transfer coater and then passed over the backing roll to a drying cylinder. Operating in conjunction with the backing roll, there is arranged an unrestrained type of dryer and from the backing roll the web is passed to a wire-supported dryer cylinder. While the wire in this embodiment is supposedly passed through the dryer cylinder section, the most critical passage with respect to web breakages, that is, the web travel within the area of the applicator and the first dryer unit, is passed only supported at the support rolls. Since the web has no continuous support when it is wet and hence has the lowest strength, this kind of web supporting offers no substantial contribution to web runnability and lesser number of web breaks.

It is an object of the present invention to provide a method for implementing a fully-supported travel of a web running on a wire or belt through the coating applicator and also, at least partially supportedly, during subsequent drying.

The goal of the invention is achieved by passing the web to a coater station or other web treatment device in which the web will be wetted and, further, to at least the first dryer located next downstream to the coater in a continuously contactingly supported manner.

According to a preferred embodiment of the invention, the web is passed in a continuously contactingly supported manner from a dryer preceding a coater to a dryer located next to the coater in the downstream direction of web travel.

According to an embodiment of the invention, the web is passed from a dryer preceding the coater to a dryer located next to a coater in the web downstream travel

direction with the help of a single continuous support means.

5 According to an embodiment of the invention, the web is passed to at least one coater with the help of the support means of the upstream preceding web treatment device.

10 According to the most preferred embodiment of the invention, the web is passed to a coater from the upstream preceding web treatment device in a supported manner and only partially dried.

15 More specifically, the method according to the invention is characterized by what is stated in the characterizing part of claim 1.

20 Further, the assembly according to the invention is characterized by what is stated in the characterizing part of claim 32.

The invention offers significant benefits.

25 Continuous belt or wire support can effectively reduce the number of web breaks occurring in the manufacture of paper grades having a low basis weight. Additionally, the support embodiment according to the present invention based on belt-supported web travel permits the web to be passed to a coater only partially dried, because this arrangement eliminates the risk of breaks in a wet web. 30 In this context, the term partially dried web must be understood to refer to a web having a moisture content essentially higher than that of the finished end product. In this manner, the drying process of the base web and 35 its coating in the manufacture of a paper/board grade can be optimized so as to achieve a maximally high quality of the finished end product. As a result, the coating pro-

cess can be carried out at the optimum moisture content with respect to the desired qualities of the coated paper/board product, specific energy consumption and the drying requirements of the base web and its coating, as well as with respect to the investment cost of drying capacity and the overall efficiency of the manufacturing process. By contrast, in prior-art embodiments it has been mandatory to pass the base web in a rather dry state into the coater in order to avoid web breaks. In practice, this has required the moisture content of the base web leaving the papermaking machine to be substantially equal to that of the finished end product.

In the following the invention will be examined in greater detail with the help of the appended drawings in which

Fig. 1 shows diagrammatically a first coater/dryer arrangement according to the invention;

20

Fig. 2 shows diagrammatically a second coater/dryer arrangement according to the invention; and

Fig. 3 shows a preferred coater arrangement utilizing an embodiment according to the invention.

25

It must be noted that the term coater in the context of the present invention is used in a broad sense including also size presses and other web treatment equipment in which a material is applied to the surface of a web in a manner causing an increase of moisture content in the web.

30

Referring to Fig. 1, a web 1 in the arrangement illustrated therein is passed to the applicator section of a coater directly from a forming section supported by a dryer wire 2 of the papermaking machine. Obviously, the

35

same arrangement may also be used in conjunction with a board making machine. At the end of the dryer section of the papermaking machine, the web 1 passes supported by a wire 2 over dryer cylinders 3, whereby the moisture content of the web 1 exiting from the papermaking machine is controlled to a desired value at these cylinders. When leaving these last dryer cylinders 3, the web is passed supported by the wire 2 of the dryer section of the papermaking machine to a first applicator station 4. The applicator is a film-transfer coater in which the coating mix is first applied by an applicator apparatus 6 onto the surface of a film-transfer roll 5 and then in a nip formed between the film-transfer roll 5 and a backing roll 7 to the surface of the web being coated. The web 1 and the dryer wire 2 pass over the backing roll 7.

Operating in conjunction with the backing roll 7, there is disposed a noncontacting dryer 8 denoted by arrows pointed toward the web in the diagram. The noncontacting dryer can be implemented as an air or steam dryer, IR dryer, microwave dryer or other suitable type of noncontacting dryer. Most advantageously, the noncontacting dryer 8 is an impingement air dryer adapted to operate with air jets directed partially against the backing roll 7 of the film-transfer coater and partially against the dryer wire 2 over the length of the continuous wire supporting the web after leaving the backing roll. This arrangement provides a long drying travel in a noncontacting manner, simultaneously keeping the overall length of the wire loop and the travel length of the wire as short as possible. Still supported by the drying wire 2, the wire is passed from the backing roll 7 in the downstream direction to a first postdryer cylinder 9, where the coated side of the web 1 wraps the dryer cylinder 9 when pressed by the wire 2 against the surface of the cylinder 9. The surface of the dryer cylinder 9 may be surfaced with an antistick coating such as Teflon®

(PTFE) or, more advantageously, a pressurized dryer cylinder is used at which air or superheated steam is blown from within the cylinder against the web thus lowering the surface pressure of the web against the cylinder or even forcing the web off from the cylinder surface into a noncontacting floating position. The cylinder 9 in the present context must be understood to refer in a general sense to any part of a dryer cylinder group. Obviously, different types of dryer cylinder elements can be used in a dryer section in lieu of the one illustrated herein when varied embodiments of the invention are to be implemented.

At this stage, the web need not necessarily be dried to its final moisture content. The dryer wire 2 of the papermaking machine is passed from the first postdryer cylinder 9 over a guide roll to the return leg of the wire back toward the direction of the papermaking machine.

The web 1 being processed now leaves the dryer wire 2 and passes onto a second wire 11 that runs over a guide roll 12 so as to transfer and support the web in the following web treatment device. Over the distance from the post-dryer cylinder 9 to the guide roll 12 of the second wire 11, the web 1 travels without support by a wire. However, the web can be passed over such a short distance unsupportedly inasmuch the web is not subjected to any stressing treatment and the web is relatively dry, whereby it is most tolerant to a possible tensional stress due to variations in web draw. This open passage of web travel can be utilized for measuring various qualities of the paper using a measurement beam sensing the sheet from both sides. However, it is also possible to pass the web if so required directly in a supported manner from the dryer wire 2 to the next dryer wire 11 using any conventional supporting means.

The second wire 11 passes the web 1 to a dryer cylinder 13, where the web travels in a nip between the dryer cylinder 13 and the wire having the coated side of the web facing the wire 11, which requires the sheet-facing side of the wire to be sufficiently smooth. Alternatively, the cylinder 11 may be any cylinder of a dryer section or a web lead roll or draw roll or a set of such rolls. Supported web travel permits the drying process of the sheet to be controlled during the different treatment steps of the web 1 so that the drying and wetting of the base sheet during application takes place in an optimal manner and the penetration of water from the coating mix into the base sheet can be controlled.

From the predryer cylinder 13, the web is passed to a backing roll 7 of a second coater station 14. At this stage, the web 1 and the second wire 11 travel so that the wire passes through the nip between the web and the backing roll 7 and, simultaneously, the applicator roll 5 rests against the web 1, whereby it applies a coat layer to the uncoated side of the web 1. Next, the web is passed supported by the second wire 11 via a noncontacting dryer section to the first postdryer cylinder 9, where the coated side of the web wraps the cylinder surface. In this web treatment step, the contacting dryer is an inverted dryer cylinder group. With the help of the inverted group, the web can be passed from the upper, leaving group to the lower, receiving group and vice versa as is the case when the supported and treated sides of the web are to be reversed, e.g., for coating the opposed side of the web. In this embodiment, also the predryer cylinder 13 is disposed in a position corresponding to that of the inverted roll group, because the cylinder is the first dryer member to receive the web.

In Fig. 2 is shown an alternative embodiment of the

invention in which the web 1 leaving, e.g., the second coater station and its inverted roll group is passed to the next coating step and, simultaneously, the supported side of the web 1 is reversed, whereby the web is passed to run on a third wire 15. It must be noted that the web may as well be received from the wire of the papermaking machine. In the case that the wire is received from the first coater station, its both sides are already coated once, whereby the embodiment of Fig. 2 is used for applying a second coat layer. Therefore, the new layer of coating is applied in this embodiment to the first side of the web in a manner slightly different from that described above for the preceding coater stations 4, 14. Herein, the applicator roll 16 is a large-diameter cylinder having dimensions approximately equal to those of the dryer cylinders and the web wraps this cylinder 16 under the loading pressure imposed by said third wire 15. The coating is metered on the applicator roll 16 by means of an applicator apparatus 6 located under the applicator roll, whereby the coat can be transferred to the web 1 during the long dwell time of the web on the cylinder surface. The application pressure is imposed by means of said third wire 15 and if so required, the loading pressure may be increased with the help of a press roll 17 or a sliding shoe pressing the wire 15 and the underlying web 1 against the applicator roll 16. From the applicator roll 16, the web 1 passes about a guide roll 18 having a noncontacting dryer 8 adapted to cooperate therewith. Next to the noncontacting dryer is disposed a postdryer cylinder 9, wherefrom web travels over an unsupported passage to a fourth wire 18 and a fourth coater station 19. Herein, the path and coating operations of the web are equivalent to those of the first coating step carried out on the second side of the web. After the application of the second coat layer to the second side of the web, the web is dried to its final moisture content and passed to an winder or, alternatively, the

web can be passed to a calender, whereby the moisture content of the web must be controlled to a proper level for calendering.

5 To remove excess moisture from the web, the dryer cylinders may be complemented with air-impingement or suction hoods 20. The web support can be implemented with the help of various kinds of belt or wire elements. A basic requirement is that the structure and material of the
10 elastic, continuous support element is compatible with the handling of the product being manufactured. In board manufacture, the wire may even have a coarse texture, while paper grades of high basis weight require a fine-weave wire and a low-weight paper grade must be supported
15 using an extremely fine-weave wire, support belt or even a support band of substantially nonpermeable, smooth material. In principle, the lower the basis weight of the product the smoother the support element must be in order to avoid marks in the supported web. Respectively, the
20 film-transfer roll of the applicator apparatus should preferably be of a soft-surfaced type, advantageously having a hardness in the range of 20 - 100 P&J when the film-transfer technique is being used for coating application.

25 In Fig. 3 is shown an embodiment according to the invention for a fully-supported web travel through a film-transfer coater. In this arrangement, both sides of the web 1 are treated at the same coater station. This
30 embodiment is particularly suited to surface sizing, wherein the surface smoothness of support elements and cylinders are not decisive to the surface quality as in the actual coating application. The arrangement is fully free from unsupported web passages and the web is supported throughout the web treatment process by a roll or
35 a support element. Supported by the papermaking machine wire 2, the web enters the film-transfer coater from,

e.g., the dryer cylinder group of the papermaking machine over dryer cylinders 3 and turning rolls. After the last dryer cylinder, the wire 2 is arranged to pass around a cross-over roll 21. The cross-over roll 21 is wrapped by
5 a cross-over support belt or wire 22 that also runs around a turning roll 23, whereby the web 1 is picked up at the cross-over roll between the papermaking machine wire 2 and the cross-over support wire 22. At the separation point of the wires 2 and 22, the cross-over support
10 wire has been arranged to pick up the web 2 by means of a suction box adapted behind the cross-over support wire 22 or by selecting the wire materials and weave smoothnesses properly or by using a smooth transfer belt to which a dry web adheres with the help of static electricity or a
15 wet web adheres due to adhesion forces which are stronger toward a smooth-surfaced belt than a permeable wire. The use of a smooth-surfaced belt is particularly advantageous in the above-described embodiment in which the web will not be dried to its final moisture content prior to
20 its surface sizing or coating application. Furthermore, this arrangement requires less space than constructions performing web transfer from one support wire to another by means of a suction box.

25 From the support wire 2, the web is transferred to a first applicator roll 24 having a first applicator apparatus 26 adapted to cooperate therewith so as to apply a surface size, coating or other web treatment agent to the surface of the roll 24. Since the outer perimeter of the
30 applicator roll 26 is wet due to the treatment agent metered thereon, the web 1 meeting the roll 24 readily adheres to the roll surface. Next, the web adhering to the surface of the first applicator roll 24 passes into the nip formed between the applicator rolls 24, 25, wherein
35 it is transferred to wrap the surface of the second applicator roll 25. A second applicator apparatus 27 is used to apply the web treatment agent to the surface of

the second applicator roll. As the web 1 has been wrapping the perimeter of the first applicator roll by half a turn, it tends to continue its adherence to the roll surface. Hence, the surface properties of the first and the second applicator roll must be selected so that the web 1 has a greater preference to leave the nip by adhering to the surface of the second applicator roll 25. As the surfaces of both applicator rolls are wetted by the web treatment agent, the web separates more readily if the supporting surface has a coarser structure provided by a more hydrophilic material or, alternatively, the surface is made harder. Toward this end, the surface of the second applicator roll may be surfaced with a smooth, hydrophobic coating such as Teflon® (PTFE), whereby the surface of the first applicator roll is surfaced with another material of a coarser structure, such as rubber.

Over the surface of the second applicator roll 25 is adapted to run a dryer group wire 11 that is passed to the applicator roll over a turning roll 12. At this stage, an air-permeable wire or felt is advantageously used as the web support element, since this arrangement permits the web 1 to be easily transferred by means a suction box 28 adapted to the point where the wire 12 leaves the second applicator roll 25 to adhere to the wire 11. Next, the web passes supported by the wire 11 to a conventional dryer cylinder group, where the wire 11 presses the web against the surface of the dryer cylinders. In surface sizing, the web 1 can be passed directly to the dryer cylinders 3, and both sides of the web can be treated in the above-described manner simultaneously.

The method taught above for transferring a web from one support element to another by virtue of utilizing the differences in the adherence properties of the support elements may be advantageously employed in the arrange-

ments illustrated in Figs. 1 and 2, as well as any other embodiments covered by the scope and spirit of the invention.

- 5 In addition to those described above, the present invention may have alternative embodiments.

Web moisture content in the various web treatment steps can be adjusted optimal to achieve the desired end result of the coating application or web treatment process, because there is no more any need to dry the web between the treatment steps below the optimum moisture content of the process in order to achieve better runnability over the unsupported passages. As a fully supported web can be handled even when wet and unsupported passages are eliminated from the travel of the wet web, the web needs drying only so much as is necessary to pass the web supportedly through the next application step and to achieve, e.g., an optimal coat surface quality, coat weight or minimized specific energy consumption in drying. In this manner, the web treatment steps can be carried out at their optimal points of the papermaking process in regard to web moisture content, e.g., to manufacture a given paper grade, to eliminate web breakage for some paper grade or implement an energy management system of the process or to control some other kind of process variable.

Web support can be implemented using a continuous movable element which may be, e.g., a metal, polymer, glass fiber or carbon fiber belt, wire, felt or web or band. As discussed above, the surface properties of support element have a decisive role in the transfer of the web from one support element to another, which means that the permeability properties of the support element surfaces must be optimized so as to eliminate all separate web tail threading or support means from the web transfer and

threading system. The selection of the suitable support element type is also dependent on the dryer equipment used, whereby air-impingement and suction dryers conventionally require a gas-permeable support element for proper function, while infrared dryers and the like need the support element to be only resistant to the heat load imposed by the dryer.

The web support method according to the invention may also be used in combination with noncontacting web support arrangements so that the web is passed supported by air jets to a section utilizing the support system according to the invention or, respectively, is passed from the process line section utilizing the support system according to the invention to the next downstream located web treatment section, where the web is guided by means of an air-jet support system. The number of dryer cylinders before and after the web treatment section discussed herein may be varied as needed and the desired sections of the web processing line may be implemented using two-wire support in which the web is supported from both sides.

The web support elements may be grouped in many different fashions. In addition to those described above, the web may be guided so that a single continuous support element is used to pass the web from the first web treatment device all the way down to the next web treatment device. The application nip or area may be formed by pressing the support belt either directly against the web by means of the belt-tensioning force or by augmenting the loading pressure with a separate press roll or sliding shoe. When the web is passed from one support element to another, it can be passed via wire/web spreading means.

Although the metering of the coating film in the above-described embodiments illustrating the use of a film-

transfer coater mention is made on the surface of an applicator roll, the coating film may as well be applied via a single belt in single-sided coating application and, in two-sided coating application, via two belts or one belt combined with an applicator roll. Accordingly, the invention is not limited to the use unrestrained drying, but instead, the web may be passed supported according to the invention directly to a dryer cylinder in a contacting manner unless other technical details of the process are contradictory to this.

Web support can be implemented over the distance from a hood-covered coater to a downstream located dryer so that the web postprocessing steps or the runnability and/or environmental aspects of the papermaking machine are taken into account with regard to good operability, control and maintenance. The hood can be divided into compartments, whereby the above-mentioned requirements are easier to meet by compartment. Web drying may also be carried out using two-sided drying. Herein, a metallic or heat-resistant polymer material belt can be used.

The methods according to the invention may be complemented with coat weight measurement means when the web travels supported on a belt or wire. Obviously, this excludes the use of two-sidedly located measurement equipment. A suitable gaging technique of, e.g., solids in the base sheet and coat weight for CaCO_3 -based pigments is the x-ray fluorescence method. The x-ray fluorescence technique may be complemented with any conventional sheet basis weight and moisture content measurement means, whereby a plurality of sheet quality factors can be computed from the measurement data.

What is claimed is:

1. Method for supporting a web (1) during the post-
processing of a web of paper or board, the method com-
prising the steps of:

- passing the web from a preceding section to at
least one next downstream located web treatment
section (4) wherein to at least one side of the web
(1) is applied a treatment agent causing wetting of
said side of said web, and

- passing the web (1) exiting said web treatment
section to at least one dryer apparatus (8),

characterized in that

- supporting the web (1) contactingly in a continuous
and unbroken manner at least from said web treatment
section (4) to said dryer (8).

2. Method according to claim 1, characterized -
ized by comprising the steps of

- drying the web (1) with at least one drying
apparatus (3) prior to passing the web to said web
treatment section (4), and

- contactingly supporting the web in a continuous and
unbroken manner at least from said drying apparatus
(3) preceding said web treatment section (4) to said
dryer apparatus (8) located downstream next to said
web treatment section.

3. Method according to claim 2, characterized -
ized in that the web (1) is supported by means of a
dryer wire (2) of a paper- or board making machine.

4. Method according to claim 2 or 3, c h a r a c -
t e r i z e d in that the web is passed supported by a
continuous support element (2) at least from a drying
5 apparatus (3) preceding said web treatment section (4) to
the drying apparatus (8) located downstream next to said
web treatment section.
5. Method according to claim 2, c h a r a c t e r -
10 i z e d in that the web (1) is passed to at least one
downstream located web treatment section (4) supported by
the continuous support element of the upstream preceding
web treatment section.
- 15 6. Method according to claim 1, c h a r a c t e r -
i z e d in that the web (1) is passed supportedly and
only partially dried from an upstream preceding web
treatment section to the next downstream located web
treatment section.
- 20 7. Method according to claim 4, c h a r a c t e r -
i z e d in that the web (1) is supported by one and the
same support element (2) through said web treatment
section (4) and during the entire web travel through the
25 next downstream located drying apparatus (8).
8. Method according to claim 1, c h a r a c t e r -
i z e d in that the web (1) is supportedly passed from
the upstream preceding, web-wetting treatment section to
30 the next downstream located web treatment section and the
web is dried so that at least a portion of the moisture
content of the web is evaporated.
9. Method according to claim 6, c h a r a c t e r -
35 i z e d in that the web (1) is passed to said web treat-
ment section in a condition optimized with respect to the
requirements of the paper grade being manufactured, the

investment costs, the frequency of web breakages, the overall energy consumption of the process, desired paper quality or the like target variable.

5 10. Method according to claim 1, c h a r a c t e r -
i z e d in that the web is supported by means of a
support element against a member of the web treatment
apparatus, advantageously a film-transfer roll or blade
10 coater, that serves to apply a web-wetting agent to the
surface of the web.

11. Method according to claim 1, c h a r a c t e r -
i z e d in that the web is dried by a microwave dryer,
air-impingement dryer, contacting dryer, suction dryer or
15 the like dryer means, wherein the web is supported by a
member of a material suitable for resisting the impact of
said drying apparatus.

12. Method according to claim 1 or 11, c h a r a c -
20 t e r i z e d in that the web is supported by means of a
belt or surfaced belt or fabric that is impermeable to
moisture.

13. Method according to claim 1 or 11, c h a r a c -
25 t e r i z e d in that the web is supported by means of a
wire, fabric, porous felt or porous or perforated belt
that is permeable or absorbent to a liquid or gaseous
medium.

14. Method according to claim 1, c h a r a c t e r -
i z e d in that at least one surface of the web is
coated with a coating which is transferred with the help
of a movable member passing through an application nip or
30 area.

15. Method according to claim 14, c h a r a c t e r -
i z e d in that said application nip or area is formed

by a loading element such as a roll, belt or sliding shoe.

16. Method according to claim 1, c h a r a c t e r -
5 i z e d in that the web is supported in the first web
treatment section by air-jet support means, after which
the web is passed onto a contacting support element for
spreading the web, subjecting the same to measurement of
10 process qualities or supportingly passing the web to
subsequent web treatment sections.

17. Method according to claim 1, c h a r a c t e r -
i z e d in that the web is supported by a plurality of
successive support elements and the web (1) is trans-
15 ferred supportedly or guided by web guidance means (10)
from one support element (2) to the next support element
(11) in the succession.

18. Method according to claim 1 or 17, c h a r a c -
20 t e r i z e d in that the web is passed from one support
element to the next via web spreading or tension-
controlling means.

19. Method according to claim 1 or 15, c h a r a c -
25 t e r i z e d in that the web (1) is pressed against the
surface of at least one roll serving to form a nip and
apply a coating.

20. Method according to claim 1 or 15, c h a r a c -
30 t e r i z e d in that the web (1) is pressed against the
surface of at least one sliding shoe element serving to
form a nip and allowing a coat-applying planar element to
slide thereon.

21. Method according to claim 1, c h a r a c t e r -
35 i z e d in that a first side of the web is supported by
a movable continuous support element, while a coating is

applied to the second side of the web using, e.g., a spray-coating method, a jet-coating method, a blade/rod coater or an applicator roll coater.

5 22. Method according to claim 1 or 22, c h a r a c -
t e r i z e d in that the web is adhered to the support
element by means of air impingement or suction.

23. Method according to claim 1, 2, 4, 5, 6 or 8,
10 c h a r a c t e r i z e d by comprising the steps of

- passing the web to a predryer cylinder group
comprising at least one dryer cylinder and pressing
the web against the cylinder by means of a single-
15 wire support arrangement,

- supportedly passing the web to a treatment of the
first side of the web, said web treatment comprising
at least the application of a coating and the
20 spreading/tensioning of the web, and

- passing the web to a like treatment of its second
side and then by means of a single-wire support
arrangement to a postdryer group.

25 24. Method according to claim 1, c h a r a c t e r -
i z e d in that the web is supported by a succession of
support elements (2, 22, 24, 25, 11) whose surface
qualities are selected so that the adherence of the web
30 at the cross-over point of said support elements is
stronger to the downstream next, receiving support
element than to the upstream preceding, delivering
support element.

35 25. Method according to claim 24, c h a r a c t e r -
i z e d in that the web is supported by elements in
which the surface of the delivering support element is

more hydrophilic than the surface of the receiving support element.

26. Method according to claim 24, c h a r a c t e r -
5 i z e d in that the web is supported by elements in which the surface of the delivering support element is softer than the surface of the receiving support element.

27. Method according to claim 24, c h a r a c t e r -
10 i z e d in that the web is supported by elements in which the surface of the delivering support element (24) has a coarser texture than the surface of the receiving support element (25).

28. Method according to claim 24, 25, 26 or 27, in which
15 method the web treatment device is a film-transfer coater, c h a r a c t e r i z e d by comprising the steps of

20 - passing the web (1) transferred on the support wire (2) of the dryer to a first support element (22),

- passing the web (1) from said first support element
(22) onto the surface of a first film-transfer appli-
25 cator roll (24),

- passing the web supported by the outer circumferen-
tial surface of said first film-transfer applicator
roll (24) onto a second film-transfer applicator roll
30 (25), and

- passing the web supported by the outer circumferen-
tial surface of said second film-transfer applicator
roll (25) onto a next downstream located contacting
35 support element (11).

29. Method according to claim 1 or 24, c h a r a c -

t e r i z e d in that the web is supported by means of a movable element that can be, e.g., a metal, polymer, glass fiber or carbon fiber belt, wire, felt or web or band.

5

30. Method according to claim 1, 15 or 24, c h a r -
a c t e r i z e d in that the web is supported in the
film-transfer coater by means of a support belt that
serves to transfer a web treatment agent to the surface
10 of the web.

31. Assembly for supportedly guiding a web (1) during
the postprocessing of a web of paper or board, said
assembly comprising

15

- at least one web treatment device (4),

- at least one device (3) preceding said web
treatment device,

20

- elements (2) for passing the web (1) from said
preceding device (3) to at least one next downstream
located web treatment device (4) suited for applying
to at least one surface of the web (1) a treatment
25 agent that wets the web, and

25

- elements for passing the web (1) to at least one
dryer (8) following said web treatment device,

30 c h a r a c t e r i z e d by

- at least one support element (2) for passing the
web (1) in a continuous and unbroken manner at least
from said web treatment device to said next down-
stream located dryer.

35

32. Assembly according to claim 31, c h a r a c t e r -

i z e d by

- at least one dryer (3) for drying the web prior to passing the web to said web treatment device (4), and

5

- a support element for contactingly supporting the web (1) in a continuous and unbroken manner at least from said dryer (3) preceding said web treatment device (4) to said dryer (8) located downstream next to said web treatment device.

10

33. Assembly according to claim 31, c h a r a c t e r - i z e d in that said element for passing the web (1) is a dryer wire (2) of a paper or boardmaking machine.

15

34. Assembly according to claim 31, c h a r a c t e r - i z e d by a single continuous support element (2) being used for passing the web in a supported manner at least from said dryer (3) preceding said web treatment device (4) to said dryer (8) located downstream next to said web treatment device.

20

35. Assembly according to claim 31, c h a r a c t e r - i z e d by a single continuous support element being used for passing the web (1) to at least one next downstream web treatment device from an upstream preceding web treatment device.

25

36. Assembly according to claim 35, c h a r a c t e r - i z e d by one and the same support element (2) being used for supporting the web (1) through said web treatment device (4) and during the entire web travel through the next downstream located dryer (8).

30

37. Assembly according to claim 31, c h a r a c t e r - i z e d by having at least one support element adapted to support the web (1) so as press the web against a

35

member of the web treatment section, advantageously a film-transfer roll or blade coater, that serves to apply a web-wetting agent to the surface of the web.

5 38. Assembly according to claim 31, c h a r a c t e r -
i z e d by at least one microwave dryer, air-impingement
dryer, contacting dryer, suction dryer or the like dryer
apparatus, wherein the web is supported by a member of a
material suitable for resisting the impact of said dryer.

10

39. Assembly according to claim 31 or 38, c h a r a c -
t e r i z e d in that said support element is a belt or
surfaced belt/fabric that is impermeable to moisture.

15

40. Assembly according to claim 31 or 38, c h a r a c -
t e r i z e d in that said support member is a fabric,
porous felt or porous/perforated belt that is permeable
or absorbent to a liquid or gaseous medium.

20

41. Assembly according to claim 31, c h a r a c t e r -
i z e d by at least one movable element capable of
defining at least one application nip or area in which
nip or area at least one surface of the web is coated
with a coating transferred with the help of said movable
25 member passing through said application nip or area.

30

42. Assembly according to claim 41, c h a r a c t e r -
i z e d by having said application nip or area defined
with the help of a loading element such as a roll, belt
or sliding shoe.

35

43. Assembly according to claim 31, c h a r a c t e r -
i z e d by a plurality of successive support elements
serving to support the web and to transfer the web (1)
supportedly or guided by web guidance means (10) from one
support element (2) to the next support element (11) in
the succession.

44. Assembly according to claim 31, c h a r a c t e r -
i z e d by means for supposedly pressing a first side
of the web against a movable continuous support element
5 and means for applying a coating to the second side of
the web using, e.g., a spray-coating method, a jet-
coating method, a blade/rod coater or an applicator roll
coater.

10 45. Assembly according to claim 31 or 44, c h a r a c -
t e r i z e d by air-impingement or suction means for
adhering the web to the support element.

15 46. Assembly according to claim 31, c h a r a c t e r -
i z e d in that the surface of the support element is
patterned with a desired surface texture serving to make
a desired surface or base coating pattern on the web side
to be treated.

20 47. Assembly according to claim 31, c h a r a c t e r -
i z e d by a succession of support elements (2, 22, 24,
25, 11) serving to support the web, said support elements
having their surface qualities so selected as to make the
adherence of the web at the cross-over point of said sup-
25 port elements stronger to the downstream next, receiving
support element than to the upstream preceding, deliver-
ing support element.

30 48. Assembly according to claim 47, c h a r a c t e r -
i z e d in that the surface of the delivering element is
more hydrophilic than the surface of the receiving
element.

35 49. Assembly according to claim 47, c h a r a c t e r -
i z e d in that the surface of the delivering element
(24) has a coarser texture than that of the surface of
the receiving element (25).

50. Assembly according to claim 47, c h a r a c t e r -
i z e d in that the surface of the delivering element
(24) is softer than the surface of the receiving element
5 (25).

51. Assembly according to claim 47, 48 or 49, in which
system said web treatment device is a film-transfer
coater, c h a r a c t e r i z e d by

10 - a support wire (2) of the dryer serving to pass the
web (1) to a first support element (22) on which the
web (1) is transferred onto the surface of a first
film-transfer applicator roll (24),

15 - a second film-transfer applicator roll (25) serving
to receive the web which has been transferred and
supported by the surface of the first film-transfer
applicator roll (24), and

20 - a next downstream located, contacting support
element (11) serving to receive the web (1) which has
been transferred and supported by the surface of the
second film-transfer applicator roll (25).

25 52. Assembly according to claim 30 or 47, c h a r a c -
t e r i z e d in that the web is supported by means of a
movable element that can be, e.g., a metal, polymer,
glass fiber or carbon fiber belt, wire, felt or web or
30 band.

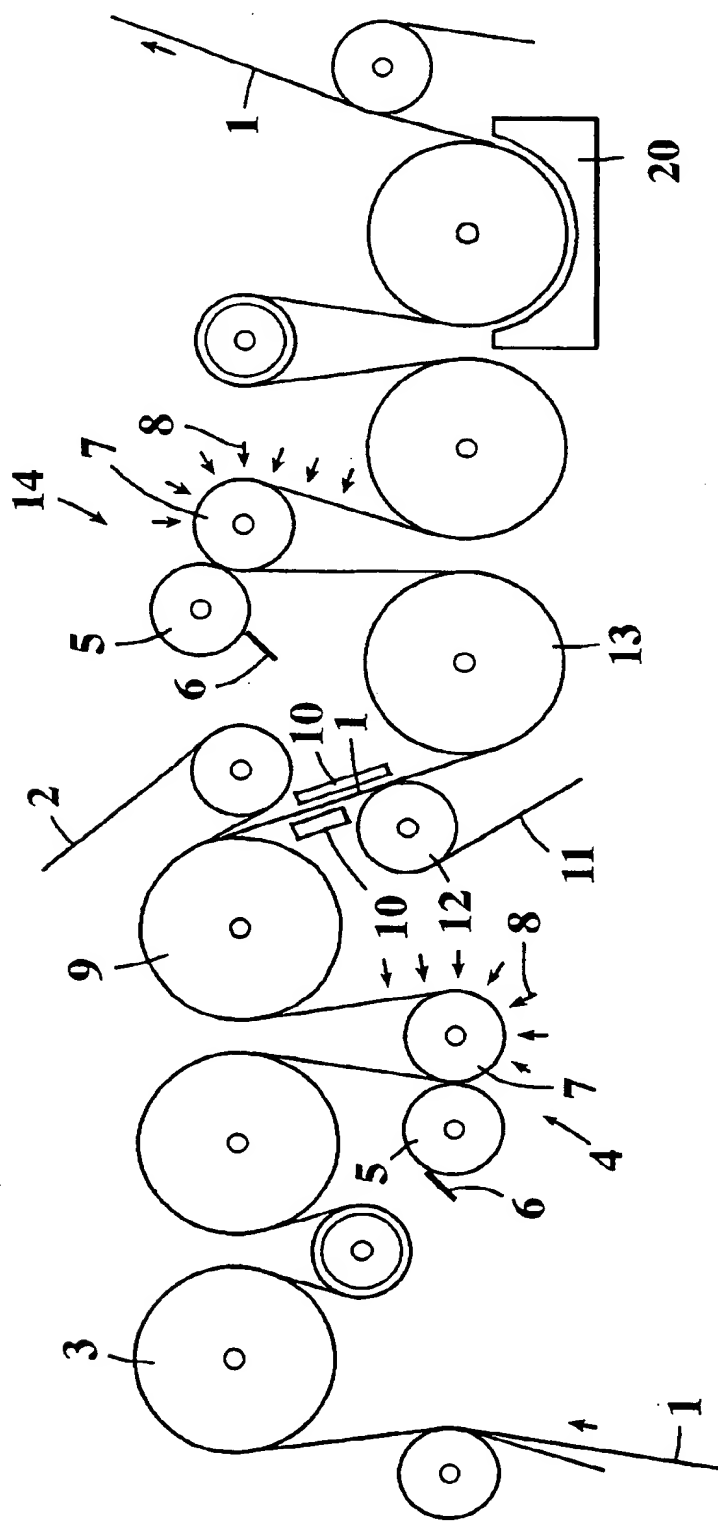


Fig. 1

JC18 Rec'd PCT/PTO 0 3 JUL 2001


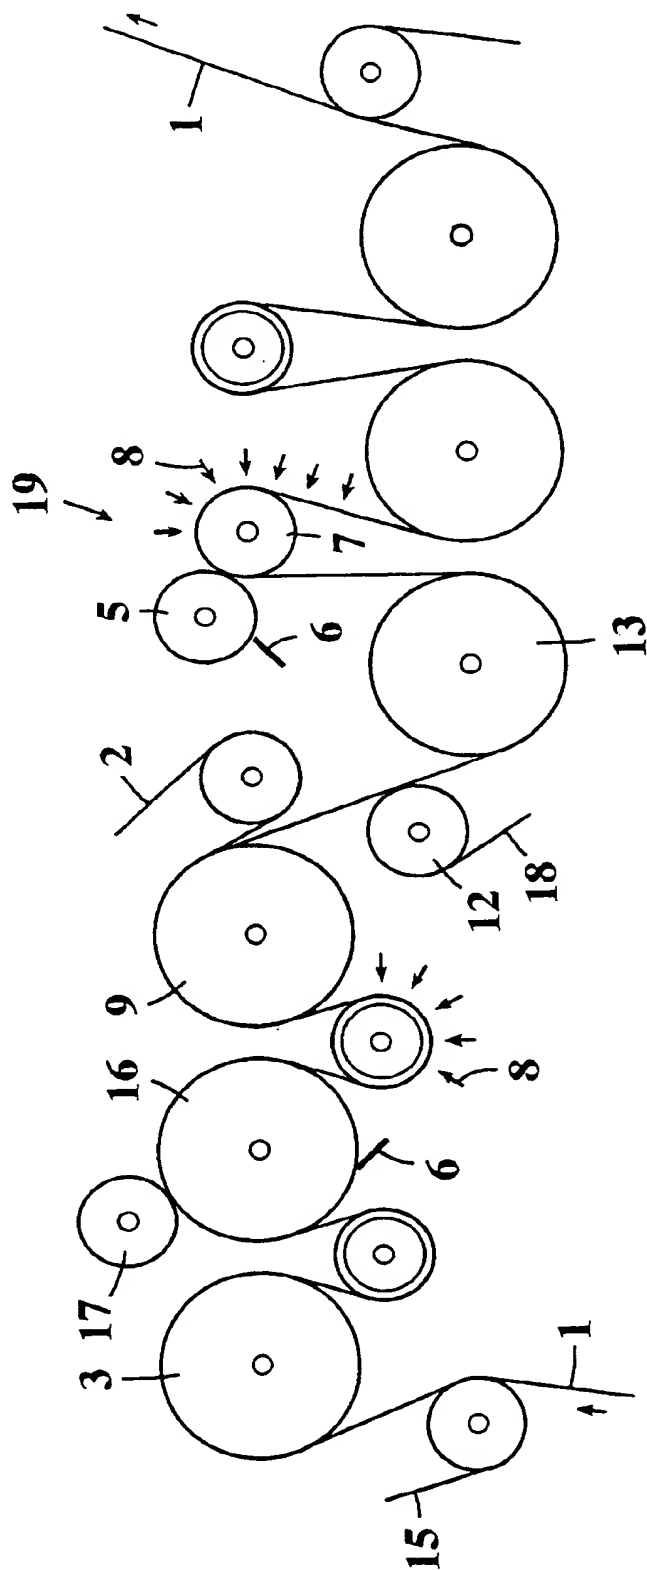


Fig. 2

JC18 Rec'd PCT/PTO 0 3 JUL 2001

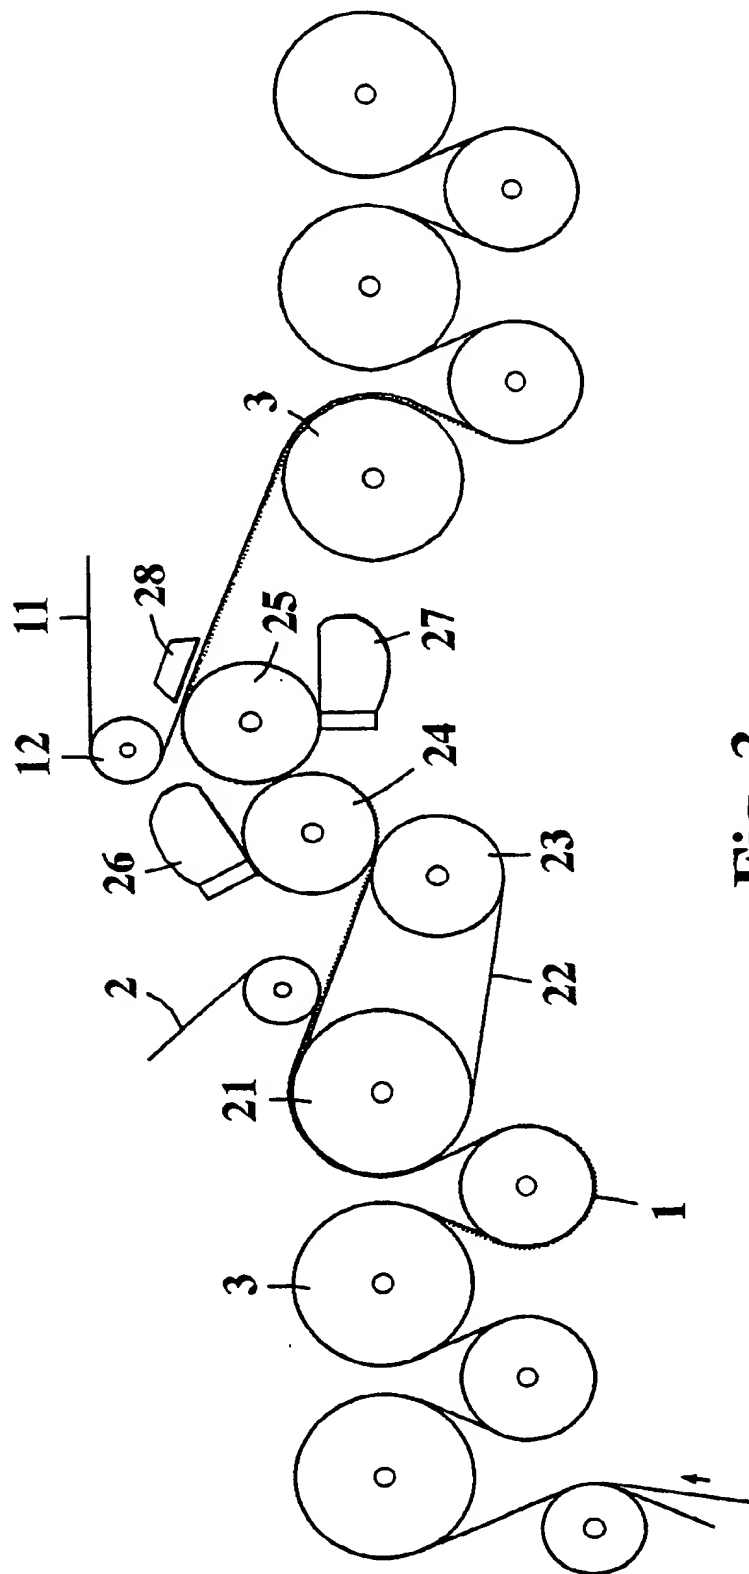

JC01001001 0 3 JUL 2001

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00008

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21H 23/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21H, D21F, B05C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| P,A | WO 9945203 A1 (VALMET CORPORATION), 10 Sept 1999 (10.09.99) --- | 1-52 |
| A | US 5547509 A (THOMAS M. NEIDER ET AL), 20 August 1996 (20.08.96) -- | 1-52 |
| A | DE 4420242 A1 (J.M. VOITH GMBH), 5 January 1995 (05.01.95) ----- | 1-52 |

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 March 2000

Date of mailing of the international search report

20 -03- 2000

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Monika Bohlin/Els
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/12/99

International application No.
PCT/FI 00/00008

| Patent document cited in search report | | | Publication date | Patent family member(s) | | Publication date |
|---|---------|----|---------------------|----------------------------|------------|---------------------|
| WO | 9945203 | A1 | 10/09/99 | FI | 980483 D,V | 06/11/98 |
| US | 5547509 | A | 20/08/96 | NONE | | |
| DE | 4420242 | A1 | 05/01/95 | CA | 2151287 A | 11/12/95 |
| | | | | EP | 0695828 A | 07/02/96 |
| | | | | FI | 952822 A | 11/12/95 |
| | | | | JP | 8120588 A | 14/05/96 |